


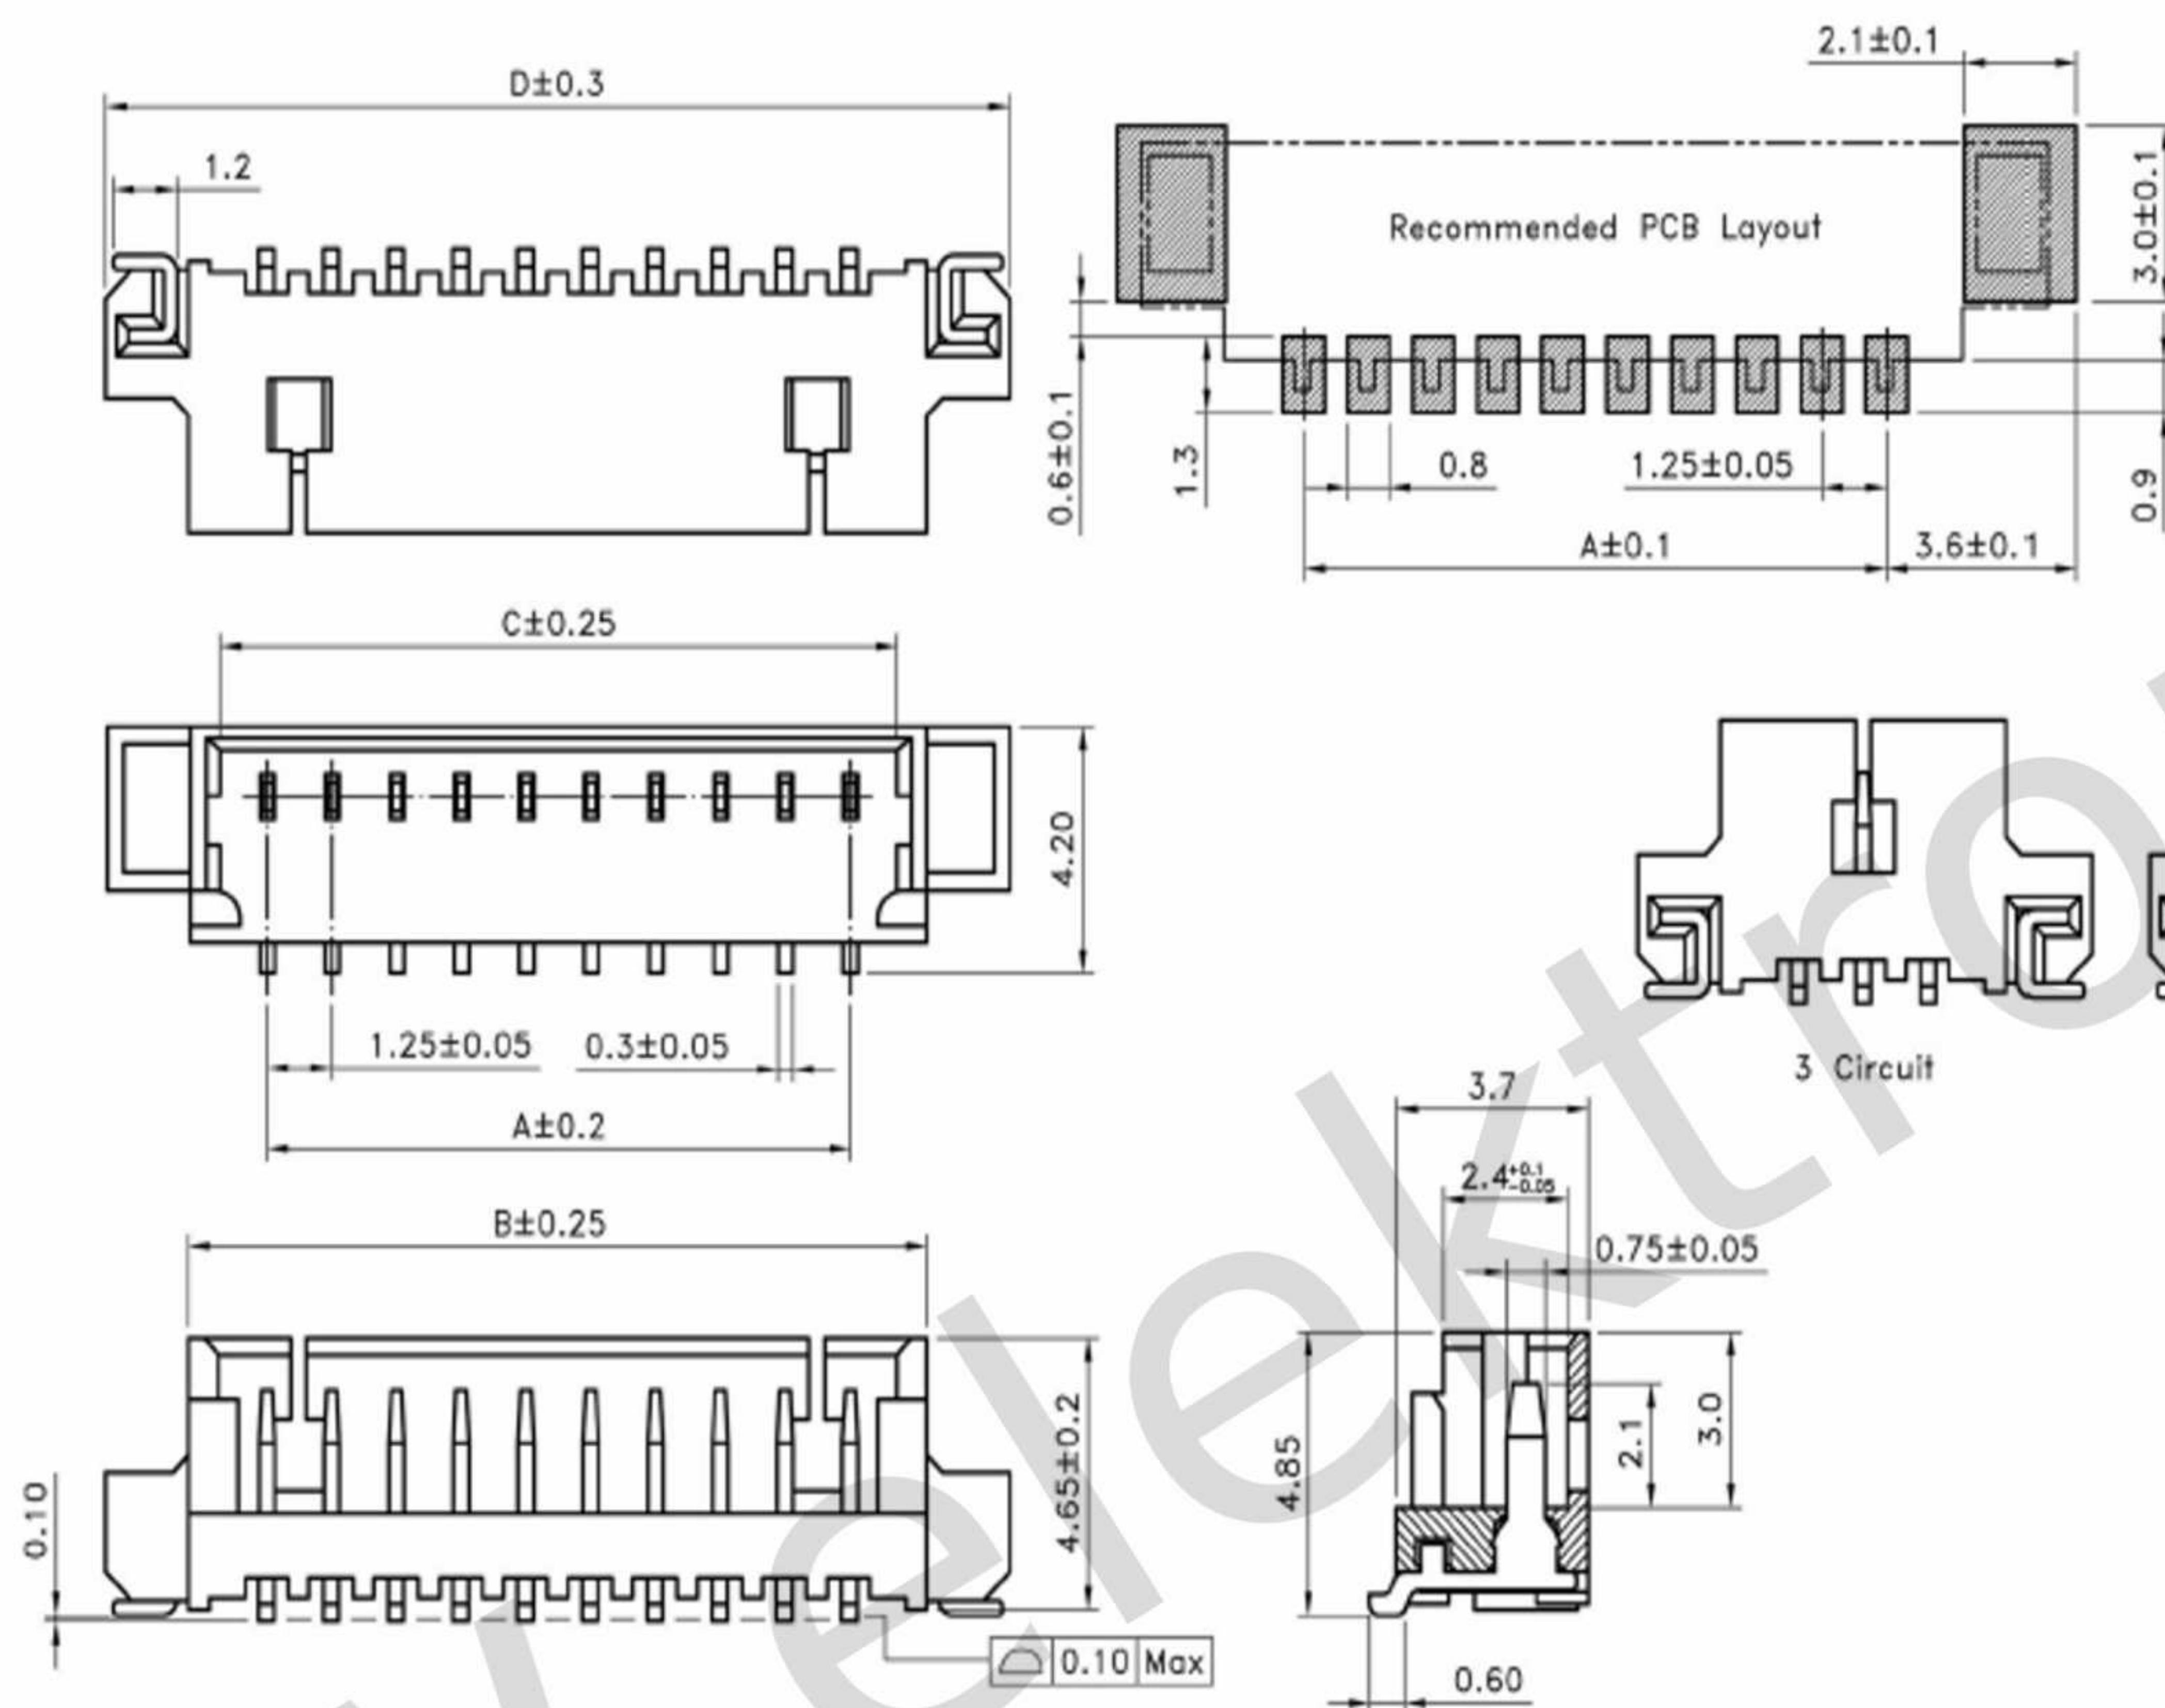

SPECIFICATIONS

- Voltage Rating : 125V AC/DC
- Current Rating : 1A AC/DC
- Withstanding Voltage : 250V AC /minute
- Insulation Resistance : 100M Ω min
- Temperature Range : - 40°C to + 85°C
- Contact Resistance : 20m Ω max

WAFER

- Poles : 2 - 15
- Material : Contact : Brass ; Tin Plated
Base : Nylon PA46 UL94V-0
- Q' ty : 1,000 pcs./Tape & Reel

Poles	Dimensions (mm)			
	A	B	C	D
2	1.25	4.25	3.05	7.65
3	2.50	5.50	4.30	8.90
4	3.75	6.75	5.55	10.15
5	5.00	8.00	6.80	11.40
6	6.25	9.25	8.05	12.65
7	7.50	10.50	9.30	13.90
8	8.75	11.75	10.55	15.15
9	10.00	13.00	11.80	16.40
10	11.25	14.25	13.05	17.65
11	12.50	15.50	14.30	18.90
12	13.75	16.75	15.55	20.15
13	15.00	18.00	16.80	21.40
14	16.25	19.25	18.05	22.65
15	17.50	20.50	19.30	23.90

Oznaczenie	JS-1359-XX SMT	
Opis	1.25mm WAFER SMT STRAIGHT TIN PLATED IVORY COLOR ROHS LOW-LEAD	
	WW elektronik s.c. ul. Kraszewskiego 26 81-815 Sopot	Tel. 058 551-11-15 fax. 058 550-45-17 e-mail: info@wwelektronik.com.pl
	www.wwelektronik.com.pl	