

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C



Insulation Resistance: 1000mΩ / min.

Dielectric Withstanding Voltage: 1500V AC / min.

Contact Resistance: 10mΩ / max.

Material

Material: Nylon66, UL94V-2

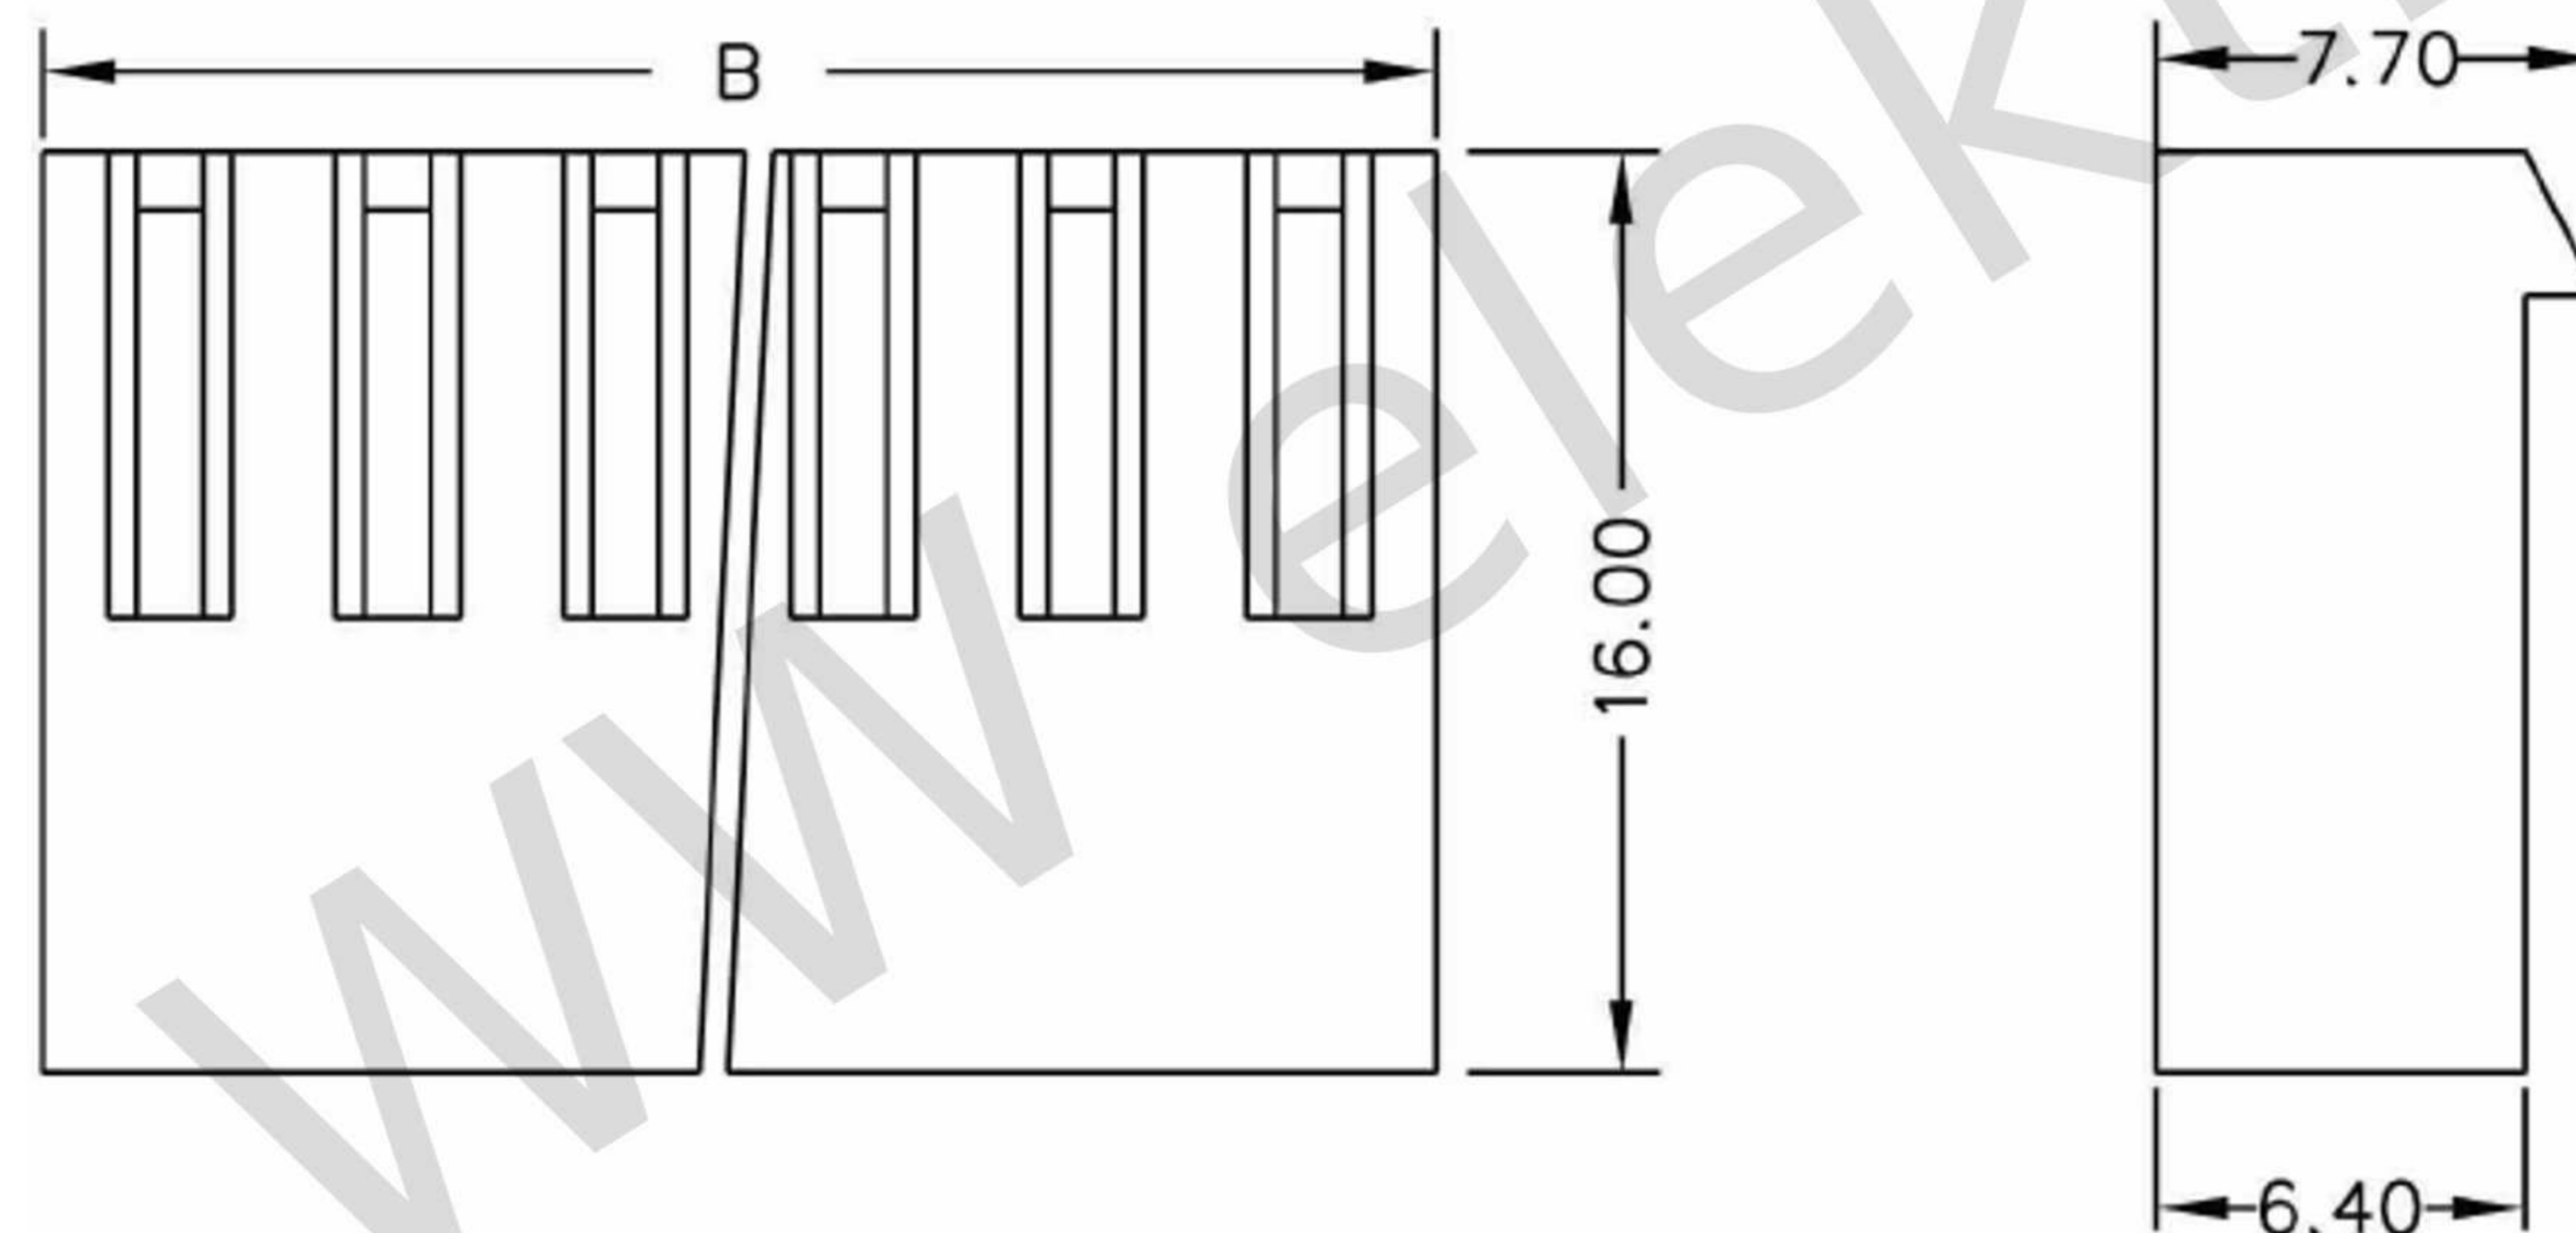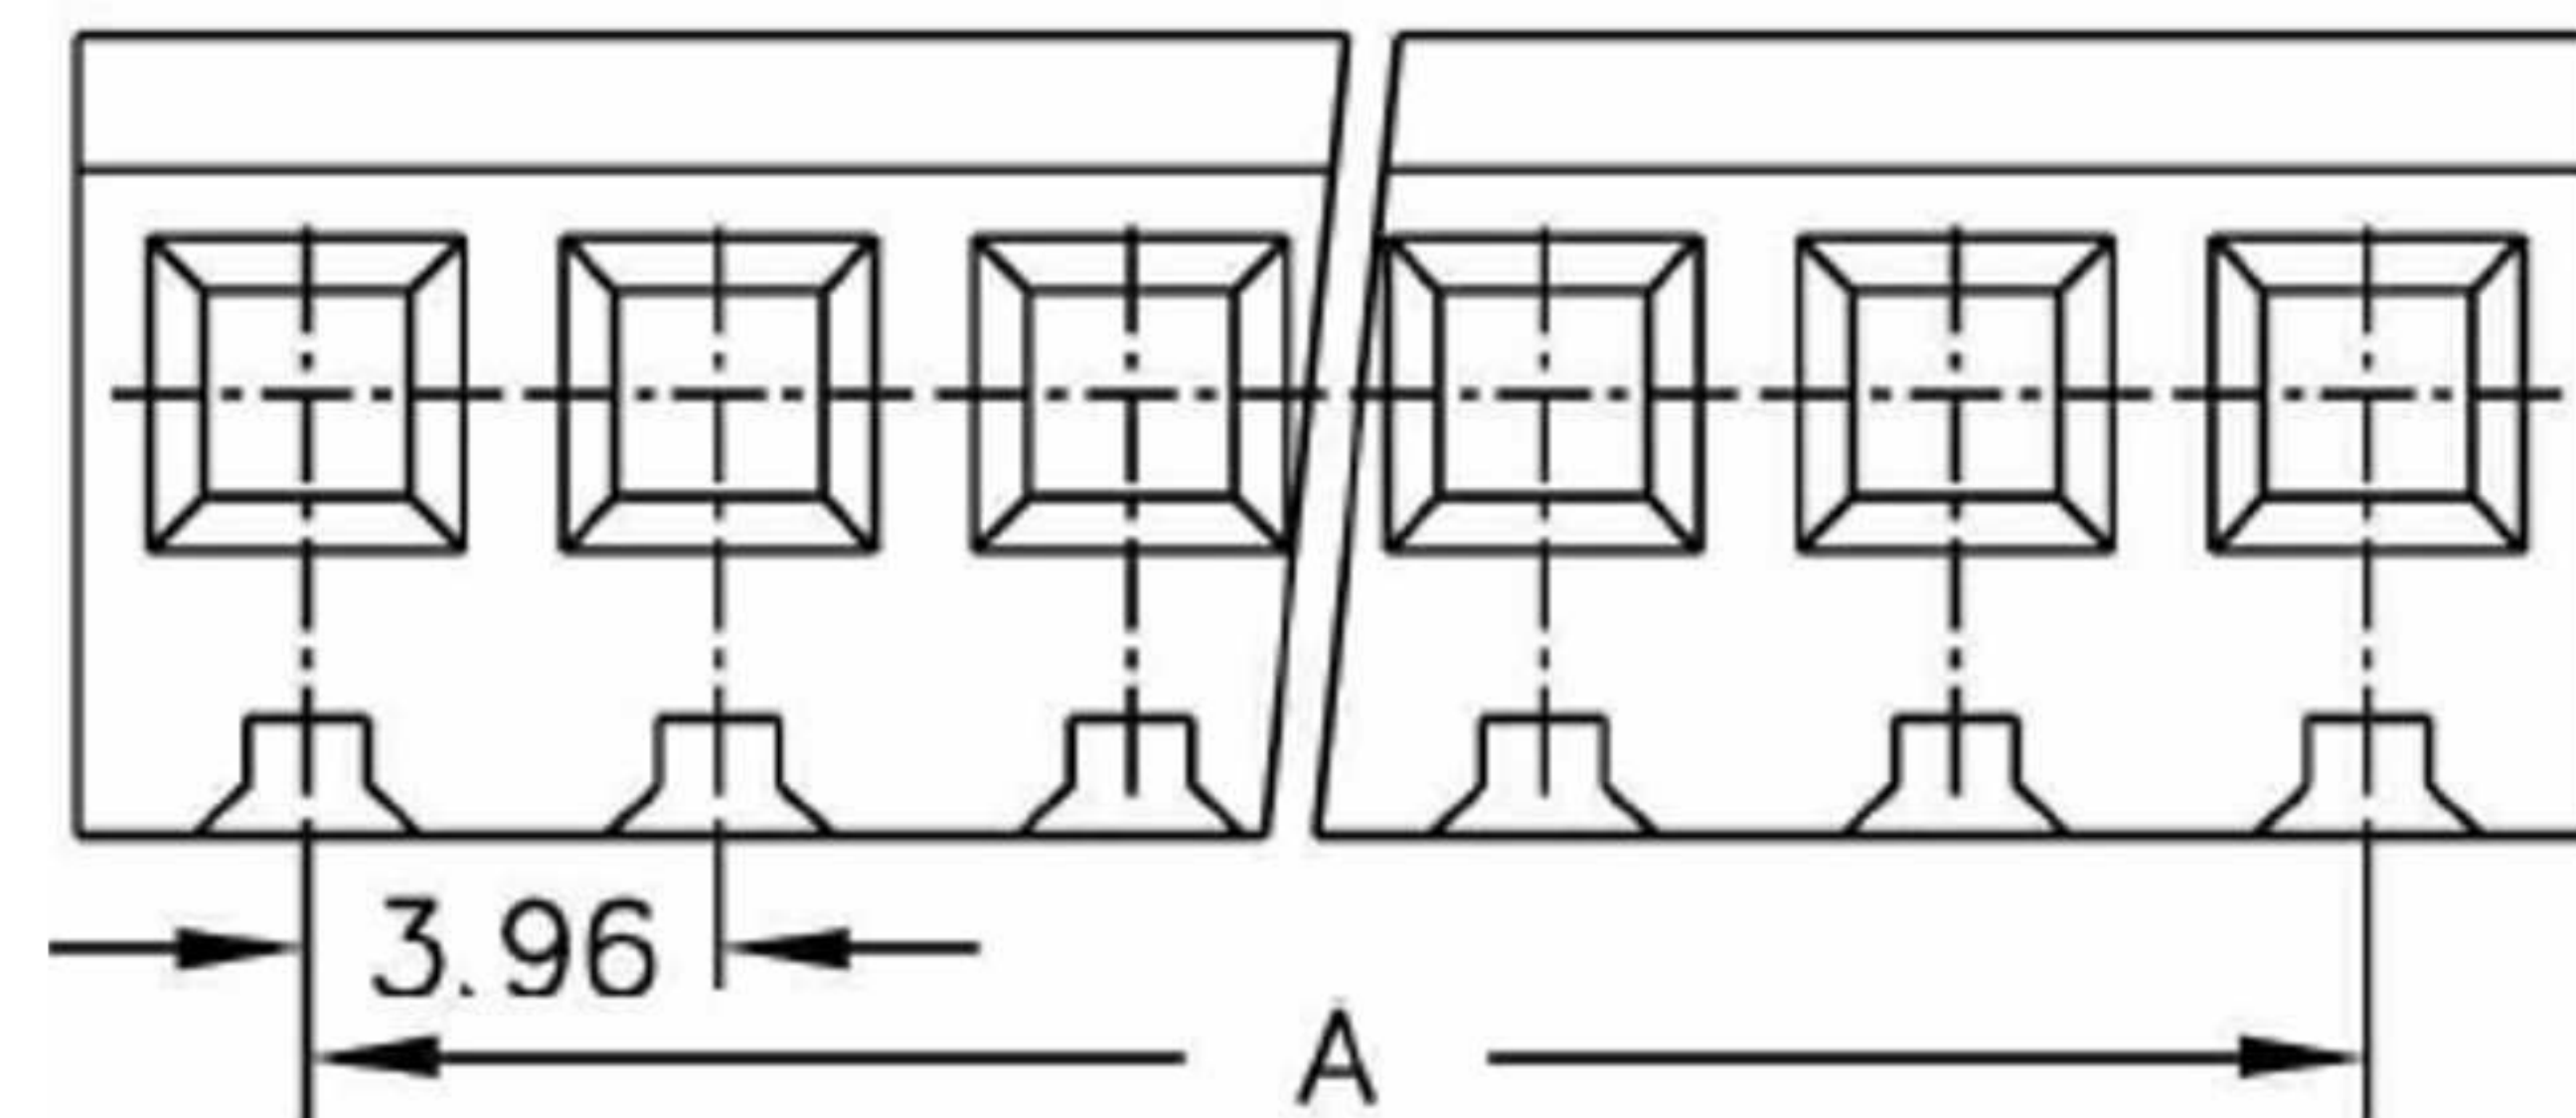

Poles	Dimension mm (in.)	
	A	B
2	3.96	8.45
3	7.92	12.39
4	11.88	16.35
5	15.84	20.31
6	19.80	24.27
7	23.76	28.23
8	27.72	32.19
9	31.68	36.15
10	35.64	40.11
11	39.60	44.07
12	43.56	48.03
13	47.52	51.99
14	51.48	55.95
15	55.44	59.91
16	59.40	63.87

Oznaczenie	JS-5001	
Opis	Crimp terminal housing 3,96mm	
	WW elektronik s.c. ul. Kraszewskiego 26 81-815 Sopot	Tel. 058 551-11-15 fax. 058 550-45-17 e-mail: info@wwelektronik.com.pl
	www.wwelektronik.com.pl	