



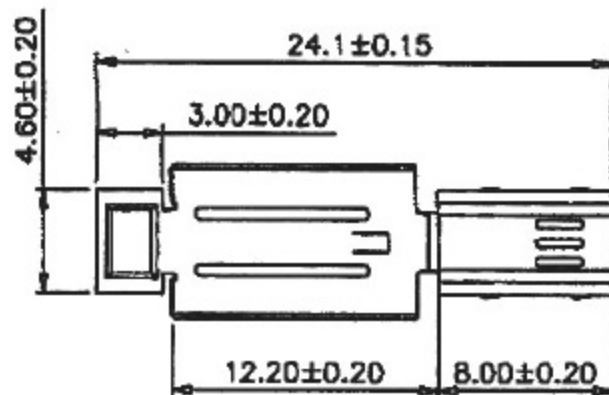

特性: Specifications:

- 電圧: Electric:
●接触抵抗: Contact Resistance:
30 mOhms MAX.
- 耐電圧: Dielectric Withstanding Voltage:
500 V AC, AT Sea Level.
- 絶縁抵抗: Insulation Resistance:
1000 MEGA ohms MIN.
- 材料: Material:
●筐体: Housing: High Temperature Thermoplastic,
UL 94V-0 耐高温度性.
- 端子: Contact: Copper Alloy, 銅合金.
- 嵌殻: Shell: Copper Alloy, 銅合金.
- 毛鍍: Finish:
●端子: Contact: Plated Gold in Mating Area,
Tin/Lead On Solder Tails,
接觸點鍍金, 腳鍍錫鉛.
- 嵌殻: Shell:
Tin/Lead Plating, 鍍錫鉛.

DISTRIBUTOR

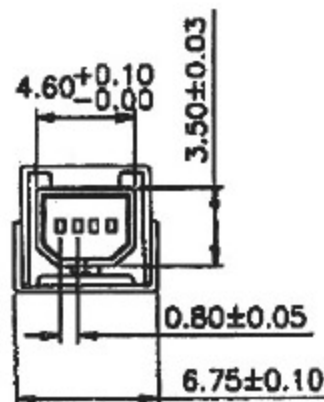

nasze
złącza
Wielektronik



WW elektronik s.c.
Ul. Kraszewskiego 26
81-881 Sopot
Poland / Europe

<http://www.wwelektronik.com.pl>
info@wwelektronik.com.pl
tel.: +48 58 551 11 15
fax.: +48 58 550 45 17

UNIT

MM

SCALE

1:1

PART NAME

MINI USB B TYPE
SOLDER TYPE

APPD.

CKD.

TOLERANCE

± 0.3

PART NO.

C8325-04BMSXX0

REV.

A